

Standard Oval Basin without Overflow Item No. 151


For Drop-in Installation


Drop-in installation is accomplished by using a self-adhesive silicone gasket applied during installation to a special groove in the flange of the bowl.

Gasket is not required for Drop-in installation on some color and finish combinations. See page 1.1.1 Color & Finish Guide for these choices. Order Item number 150 for any of these color and finish combinations.

Available with or without overflow.

For Basins ordered without Overflow, Drain Collar is *required* to install drain.
See Hardware pg B.1.7 to order Drain Collar, Item number 911.xx as a separate item with choice of metal finish.

 See page 1.1.e for general ADA guidelines. Contact factory for installation of this product to meet ADA guidelines in coordination with your faucet specification.

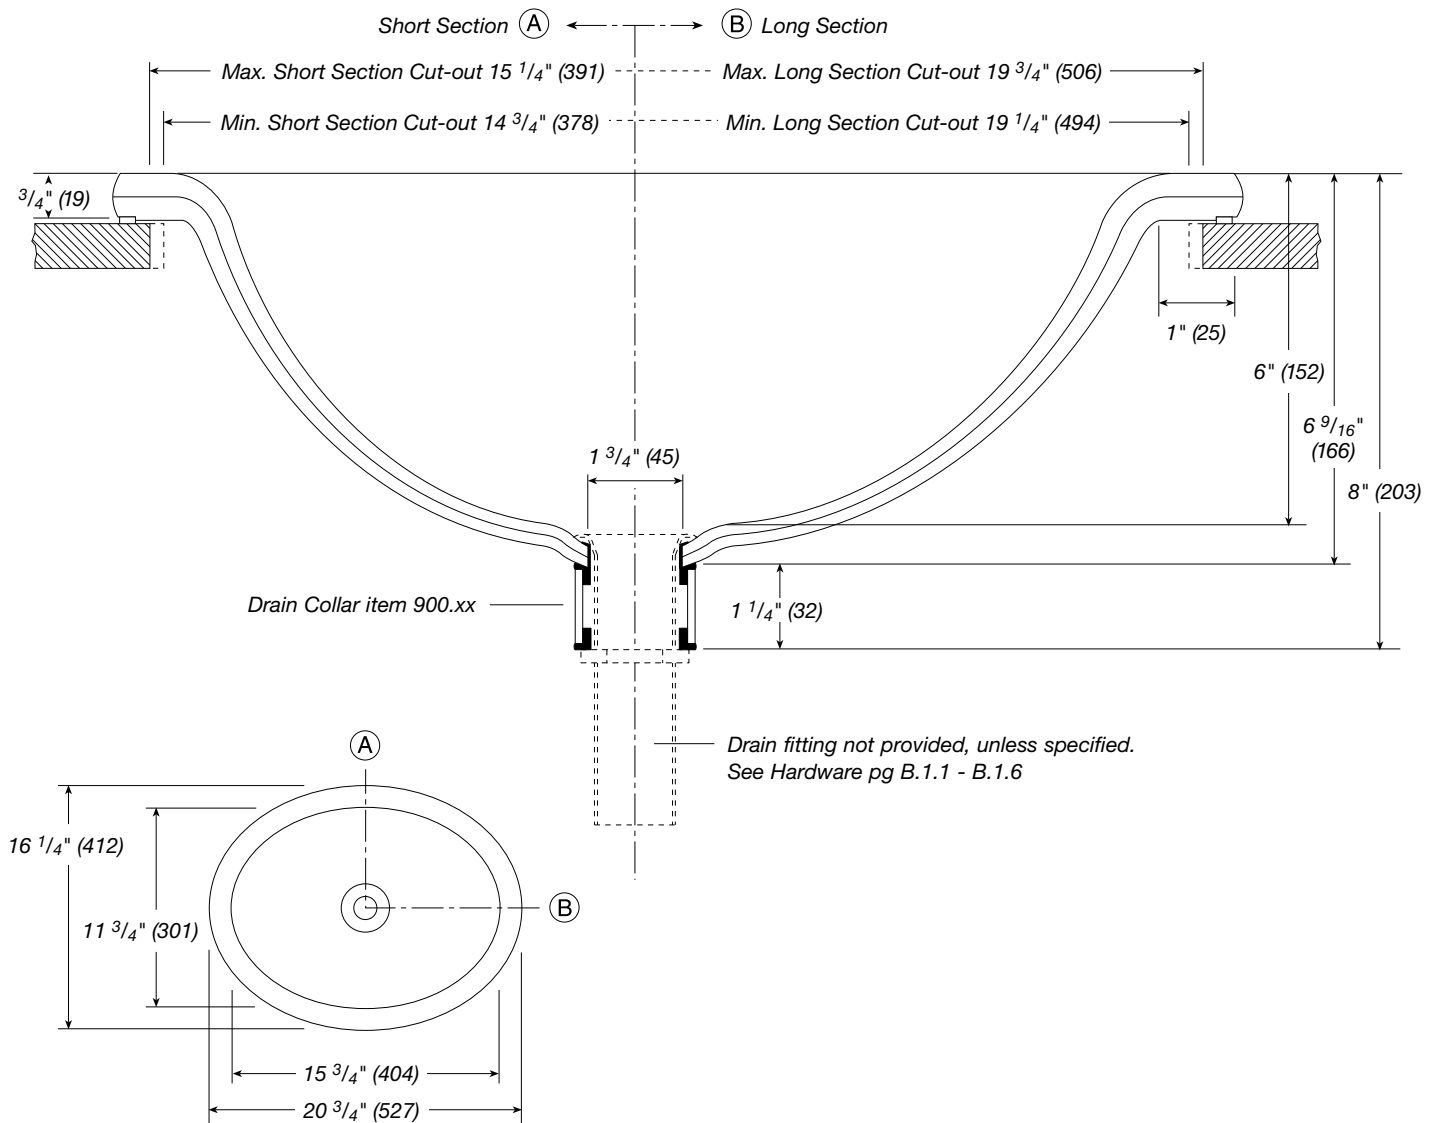

Recommended Cut-out sizes:
 Max. Cut-out $15 \frac{1}{4}"$ (391) x $19 \frac{3}{4}"$ (506)
 Min. Cut-out $14 \frac{3}{4}"$ (378) x $19 \frac{1}{4}"$ (494)